




Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

JC986 U.S. PTO

09/912133



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00202684.7

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE, 12/02/01  
LA HAYE, LE

**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung  
Sheet 2 of the certificate  
Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.: 00202684.7  
Demande n°:

Anmeldetag:  
Date of filing: 28/07/00  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
Koninklijke Philips Electronics N.V.  
5621 BA Eindhoven  
NETHERLANDS

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:

System for controlling an apparatus with speech commands

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**

PHTW000005EPP

1

27.07.2000

System for controlling an apparatus with speech commands

## FIELD OF THE INVENTION

The invention relates to a system of an apparatus and a remote control for controlling said apparatus, the system comprising a speech processor for processing speech commands, the remote control comprising a microphone for enabling a user of said remote control to input said speech commands. The invention further relates to a remote control and an apparatus for use in the above system. The invention further relates to a method of controlling an apparatus, comprising a step of processing speech commands for controlling said apparatus.

## 10 BACKGROUND OF THE INVENTION

Recent developments in speech recognition techniques have enabled users of electronic systems to control said systems by means of spoken commands. Often, such systems are applied in a multi-user setting, e.g. a TV system is used by different members of a household. One of the problems with such systems is that two or more users may be speaking to the system at the same time. Since the users can speak the commands at any time and location, it is very difficult to resolve the input conflict. Even if the speakers utter their commands at different times, contradictory commands from different users still cause a problem. Obviously, discrimination of speech input is a serious concern for voice control with multiple users.

20 US-A-5,777,571 discloses a solution to this problem. Users are registered as authorized users, and their speech commands are distinguished from speech commands from other users by means of voice identification techniques. A problem of this solution is that voice identification is an expensive and still unreliable technique, and new or occasional users need to be introduced to the system for authorization. Such an introduction often involves a lengthy training phase. Furthermore, this solution cannot resolve the problem that many speakers speak at the same time.

PHTW000005EPP

2

27.07.2000

**OBJECT AND SUMMARY OF THE INVENTION**

It is an object of the invention to provide an improved system and method of the type defined in the opening paragraph. To that end, the invention provides a system wherein the system also comprises a further microphone for enabling further users of the system to input speech commands. The system according to the invention thus provides (at least) two microphones for controlling the apparatus. One of said remote controls is located on the remote control and is arranged to pick up speech commands uttered by the user of the remote control. The other microphone is located elsewhere, e.g. on the apparatus or at a central place in the room, and is arranged to pick up speech commands uttered by other users of the system which are not currently operating the remote control. In this way it is achieved that the system can distinguish speech commands from the user operating the remote control on the one hand, and other users on the other hand. Hence, the speech commands uttered by the user who is operating the remote control are guaranteed to be optimally recognized, since the microphone is located relatively close to the user, and may have suitable characteristics to pick-up sounds from the appropriate direction only. When multiple users are speaking simultaneously, the system may give priority to signals received from the microphone on the remote control, so that at least commands uttered by the user of the remote control will be recognized and processed.

An embodiment of the system according to the invention is characterized by said further microphone being an omnidirectional microphone. In this way it is achieved that the position of the other users in the room is not critical. By contrast, the microphone on the remote control is preferably unidirectional and oriented such that it aims at its user's mouth when held in a normal manner.

An embodiment of the system according to the invention is characterized by said system comprising input designation means for user operably designating said microphone and/or said further microphone as a signal source to said speech processor. In this way it is achieved that the system enables the speech commands obtained from the microphone and the further microphone to be selectively transmitted to the speech processor. For example, the speech processor may be controlled to process speech input from the microphone on the remote control only. Alternatively, the speech processor may be controlled to process speech input from the further microphone only, or from both the further microphone and the microphone on the remote control. Finally, the speech processor may be decoupled from both microphones, thus disabling the speech command facility. Preferably, the input designation means can be controlled via the remote control. For example, the

remote control may comprise a button, enabling the user to switch between three different designations, e.g. respectively accept no speech processing at all, accept speech commands from the microphone on the remote control only, and accept speech commands from the further microphone only. Alternatively, speech commands obtained from the further  
5 microphone may be accepted by default, while pressing a button on the remote control causes the microphone on the remote control to be temporarily designated as the input source of the speech processor.

## BRIEF DESCRIPTION OF THE DRAWINGS

10 These and other aspects of the invention are apparent from and will be elucidated, by way of a non-limitative example, with reference to the embodiment(s) described hereinafter. In the drawings,

Figure 1 shows a television receiver and a remote control as an embodiment of a system according to the invention,

15 Figure 2 shows a diagram of a television receiver as an embodiment of an apparatus according to the invention.

## DESCRIPTION OF EMBODIMENTS

Figure 1 shows a television receiver 101 and a remote control 102 as an  
20 embodiment of a system according to the invention. The remote control 102 comprises an infrared (IR) transmitter 103, a microphone 104 and control elements including, inter alia, a button 105. The television receiver 101 comprises an IR receiver 106 and a further microphone 107. The television receiver can be operated by means of the remote control 102. For that purpose, the remote control 102 comprises a plurality of keys for controlling various  
25 functions of the television receiver 101. For example, the remote control 102 may comprise numerical keys, zap keys etc. which are well known in the art. Additionally, a user of the remote control 102 can enter speech commands via the microphone 104, which are then transmitted to the IR receiver 106 of the television receiver 101 and converted by a speech processor, described hereinafter, to corresponding control commands. The further  
30 microphone 107 is an omnidirectional microphone which picks up speech signals from any direction, thus enabling other users which are not currently holding the remote control 102 to control the television receiver 101 by means of voice commands. The button 105 controls input designation means, described hereinafter, for designating either or both microphone 104 and further microphone 107 as a signal source for the speech processor.

PHTW000005EPP

Figure 2 shows diagram of a television receiver as an embodiment of an apparatus according to the invention. For consistency and ease of understanding, the same reference numerals as in Fig.1 are used for items having functions similar to those presented in Figure 1. TV signals are received from the ether by an antenna 201 or, alternatively, from a cable network. One of the TV signals is selected by a tuner 202, decoded and split into an audio signal, a video signal and a data signal. The audio signal is further processed by an audio processor 203 and a loudspeaker 204. The video signal is further processed by a video processor 205 and presented on a screen 206. The data signal is transmitted to a central processing unit (hereinafter "CPU") 208, which comprises one or more microprocessors capable of executing program instructions. These program instructions comprise parts of software modules including, inter alia, a command interpreter 209, and a speech processor 211. The CPU 208 is capable of controlling functions of the TV-set and transmitting data to the video processor 205 to be presented on the screen 206. The command interpreter 209 receives user commands from the IR receiver 106, which in turn receives IR signals from the remote control 102, and transmits them to the CPU 208 to be processed. For example, when the user enters a channel number the CPU 208 controls the tuner 202 to select the corresponding channel, and sends data to the video processor 205 to present feedback on the screen 206, e.g. the preset number, the channel name and the program category being displayed for a few seconds. When the user issues a zap-command, e.g. by pressing either of the up/down keys of the remote control, the same feedback is presented and the tuner 202 is controlled to select a channel which is arranged after or before the current channel.

The CPU 208 is further capable of controlling a switch 215 which constitutes input designation means for the speech processor 211. The switch 215 can adopt three states. A first state of switch 215 designates the microphone 104 of the remote control 102 as the signal source for the speech processor 211. Speech signals from the microphone 104 are converted into IR signals, received by the IR receiver 106 and transmitted to the switch 215. In the first state of switch 215 the speech signals thus obtained from the microphone 104 are input to the speech processor 211 and converted to control commands which are then transmitted to the command interpreter 209.

A second state of switch 215 designates the microphone 107 as the signal source for the speech processor 211. The microphone 107 is a part of the television receiver 101 and signals obtained from the microphone 107 are directly transmitted to a second contact of the switch 215.

PHTW000005EPP

5

27.07.2000

A third state of switch 215 designates neither microphone 104 nor microphone 107 as the signal source for the speech processor 211, thus disabling speech input completely.

The switch 215 is controlled by the CPU 208 in response to control signals received from the IR receiver 106, which control signals are in turn generated in response to the user of the remote control 102 operating the button 105. After system initialization the switch 215 adopts the first state as described above and depicted in Fig. 2. If the user presses the button 105, the switch 215 adopts the second state, thus designating the microphone 107 as the signal source to the speech processor 211 and disabling the microphone 104. If the user presses the button 105 a second time, the switch 215 adopts the third state, thus designating neither microphone 104 nor microphone 107. Pressing the button 105 again restores the first state.

In an alternative embodiment the switch 215 can adopt a fourth state, wherein signals from both microphones are accepted. However, if signals are received from both microphones simultaneously, signals received from the microphone 107 are disregarded in favor of the signals received from the microphone 104.

In summary, the invention relates to a system comprising a speech processor for controlling an apparatus (101) with speech commands. The system according to the invention comprises a remote control (102) having a microphone (104) for entering speech commands. The system also comprises a further microphone (107) for enabling other users of the system to enter speech commands too. The system may comprise input designation means (105) for user operably designating said microphone (104) and/or said further microphone (170) as a signal source to the speech processor.

Although the invention has been described with reference to particular illustrative embodiments, variants and modifications are possible within the scope of the inventive concept. Thus, for example, the speech commands may be transmitted from the remote control by means of a radio frequency (RF) signals instead of an IR signals. Furthermore, a speech processor may also be comprised by the remote control instead of or in addition to the controlled apparatus. The input designation means may be controlled by means of a control element on the remote control or on the controlled apparatus. The control element may be a single state-toggle button as described above, or any other appropriate control element, such as a 'radio button' for each state, or a multi-position switch, each position of which corresponds to a particular state. The input designation means could be a switch as described hereinbefore, or a more sophisticated switching circuit under control of the speech processor itself. This would enable the input designation means to be controlled

PHTW000005EPP

6

27.07.2000

by means of dedicated speech commands irrespective of the currently selected state. The speech processor would then first try to detect such dedicated speech commands irrespective of whether it is allowed to accept speech commands from the respective microphone, and subsequently adjust the input designation in accordance with the dedicated speech

5 commands. Preferably, only a user of the remote control would be allowed to control the input designation means in such manner.

More than two microphones may be applied, which may be located at various positions within the system, e.g. on the apparatus and the remote control as already described, or in the vicinity of the controlled apparatus. The system may also comprise multiple remote

10 controls, each comprising a microphone. Preferably, one of the remote controls serves as a master control and is the only remote control capable of controlling the input designation means.

The word 'comprising' does not exclude the presence of elements or steps other than those listed in a claim. In the claims, any reference signs placed between

15 parentheses shall not be construed as limiting the claim. The invention can be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In the device claim enumerating several means, several of these means can be embodied by one and the same item of hardware.

PHTW000005EPP

7

27.07.2000

## CLAIMS:

1. A system of an apparatus (101) and a remote control (102) for controlling said apparatus, the system comprising a speech processor (211) for processing speech commands, the remote control comprising a microphone (104) for enabling a user of said remote control to input said speech commands, wherein the system also comprises a further microphone  
5 (107) for enabling further users of the system to input speech commands.
2. A system as claimed in claim 1, said further microphone (107) being an omnidirectional microphone.
- 10 3. A system as claimed in claim 1 or 2, said further microphone (107) being comprised by said apparatus (101).
4. A system as claimed in any of claims 1 to 3, said system comprising input designation means (209,215) for user operably designating said microphone (104) and/or said  
15 further microphone (170) as a signal source to said speech processor (211).
5. A system as claimed in claim 4, said input designation means (209,215) being capable of controlling the speech processor (211) to process speech input from said microphone (104) only.  
20
6. A system as claimed in claim 4, said input designation means (209,215) being capable of controlling the speech processor (211) to process speech input from said further microphone (107) only.
- 25 7. A system as claimed in claim 4, said input designation means (209,215) being capable of controlling the speech processor (211) to process speech input from both said microphone (104) and said further microphone (107), said microphone (104) having priority over said further microphone (107).

PHTW000005EPP

8

27.07.2000

8. A remote control (102) for use in a system as claimed in any of claims 1 to 7, comprising a microphone (104) for enabling a user of said remote control to input speech commands for processing by a speech processor (211), said remote control comprising input designation means for user operably designating said microphone (104) and/or a further  
5 microphone (107) as a signal source to said speech processor.
9. An apparatus (101) for use in a system as claimed in any of claims 1 to 7, comprising a speech processor (211) for processing speech commands, and input designation means (209,215) for user operably designating a microphone (104) comprised by a remote  
10 control (102) of said apparatus and/or a further microphone (107) comprised by said apparatus as a signal source to said speech processor.
10. A method of controlling an apparatus (101), comprising a step of processing speech commands for controlling said apparatus, and a step of user operably designating a  
15 microphone (104) comprised by a remote control of said apparatus and/or a further microphone (107) comprised by said apparatus as a signal source to said speech processing.

PHTW000005EPP

## ABSTRACT:

The invention relates to a system comprising a speech processor for controlling an apparatus (101) with speech commands. The system according to the invention comprises a remote control (102) having a microphone (104) for entering speech commands. The system also comprises a further microphone (107) for enabling other users of the system to enter speech commands too. The system may comprise input designation means (105) for user operably designating said microphone (104) and/or said further microphone (170) as a signal source to the speech processor.

Fig. 1

1/2

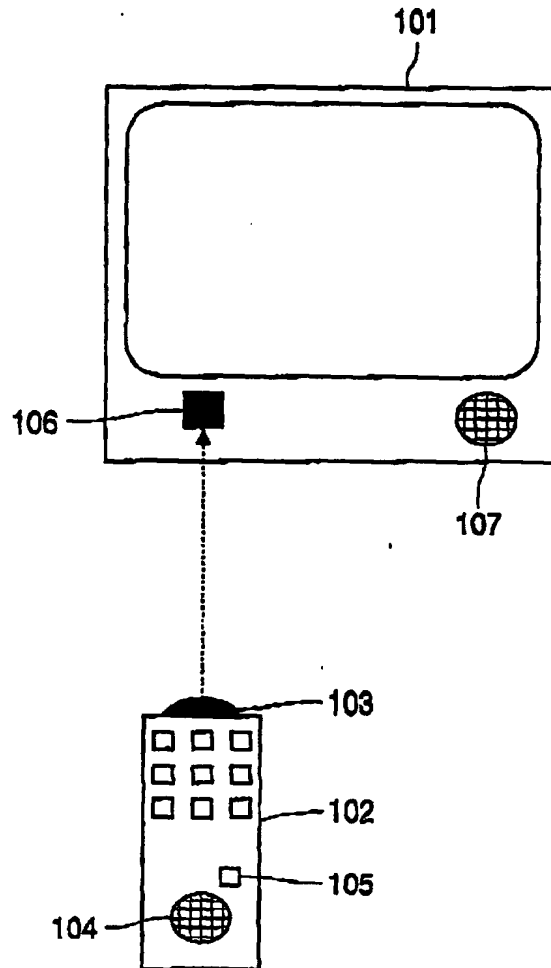


FIG. 1

28-07-2000

2000

9:40

PHILIPS CIP

EP00202684.7

39

NO.579

SPEC

PHTW000005

2/2

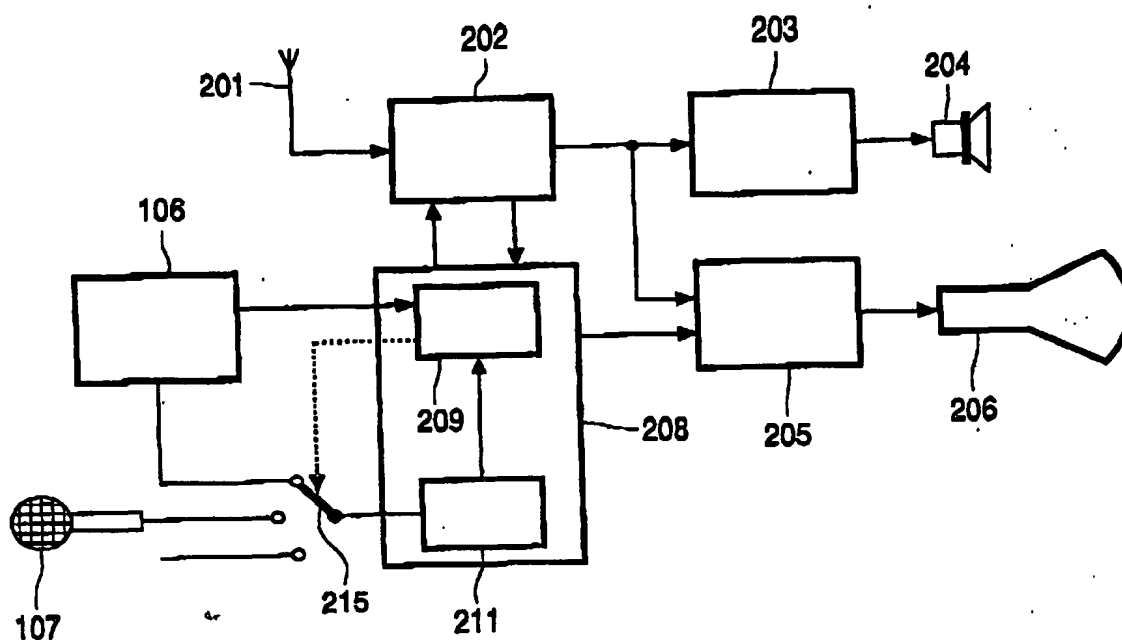


FIG. 2

**THIS PAGE BLANK (USPTO)**